D:\TF - 2023 - based on DLT request\DLT - TF - fitting\XD.FLSC,20025TF.dwg, 8/1/2023 9:08:15 AM, ISO full bleed A4 (210.00 x 297.00), 1:5.93858, Tenry

DWG. NO.:

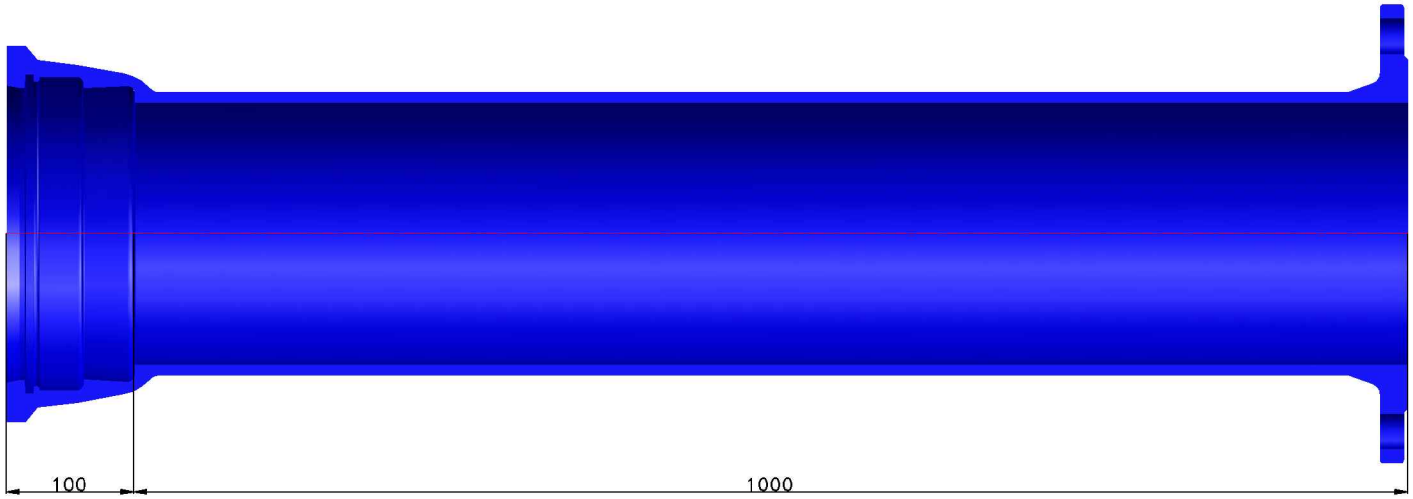

Technical Specification:

1. Ductile iron pipe & fitting are manufactured in accordance with ISO 2531;
2. Flange drilled to EN1092-2 PN25
3. Thickness K12 for all ductile iron fittings;
4. Include DI GLAND, DI RING, DI HOOK BOLTS and EPDM rubber gaskets for restraint fittings.
5. Internal and external FBE coating to DFT 300 microns.

*** Technical improvements reserved the right to XUZHOUDELTA.

DUCTILE IRON PIPES FITTINGS ACCESSORIES AND THEIR JOINTS FOR WATER & SEWERAGE

Products Description:

Ductile Iron Fittings

Flange Socket Pipe with
TF Restraint

DN200 x 1000mm Length
PN25

Flange Details:
refer to DGW NO.
XD.FL.DETAILS.25

DWG. NO.:
XD.FLSC.20025TF

SUPPLIER:

XUZHOUDELAT

SUPPLIER:REF. NO.: 9423

XUZHOU DELTA FITTINGS RESERVES THE RIGHT TO MAKE CHANGES IN DRAWINGS WITHOUT PRIOR TO NOTICE AS PART OF PRODUCTS IMPROVEMENT.