DWG. NO.:

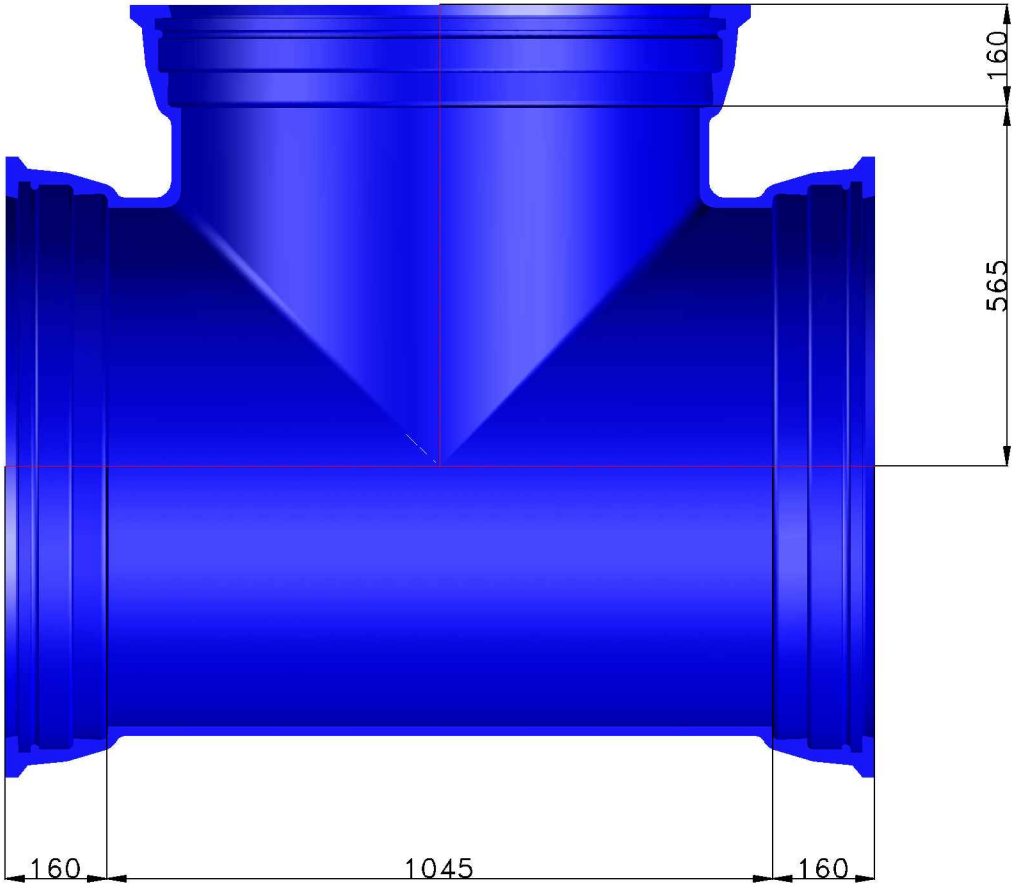


# DUCTILE IRON PIPES FITTINGS ACCESSORIES AND THEIR JOINTS FOR WATER & SEWERAGE

**Products Description:**

Ductile Iron Fittings

All Socket Tee with TF Restraint

DN800mmx800

PN25

DWG. NO.:
XD.ASTee800800TF

**SUPPLIER:**

XUZHOUDELAT

**SUPPLIER:REF. NO.: 9423**

XUZHOU DELTA FITTINGS RESERVES THE RIGHT TO MAKE CHANGES IN DRAWINGS WITHOUT PRIOR TO NOTICE AS PART OF PRODUCTS IMPROVEMENT.

## Technical Specification:

1. Ductile iron pipe & fitting are manufactured in accordance with ISO 2531;
2. Flange drilled to EN1092-2 PN25
3. Thickness K12 for all ductile iron fittings;
4. Include DI GLAND, DI RING, DI HOOK BOLTS and EPDM rubber gaskets for restraint fittings.
5. Cement lining internally, zinc spraying and bitumen coating not less than 70um externally.

*** Technical improvements reserved the right to XUZHOUDELTA.